



ALPINE SANITATION & SUPPLIES LTD.

24 Ronson Drive, Unit 16, Etobicoke, Ontario M9W 1B4

Bus: (416)-744-2120 Fax: (416)-249-1859 Toll Free: 1-800 465-6198

C

Chemical Sanitizing
Single Rack Corner
Dishwasher

Item. # _____



FEATURES:

- 37 racks / 148 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All heavy duty 304 stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps. Specially designed pull-pins allow wash arms to be easily removed for cleaning.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.
- Top mounted controls include built-in chemical pumps and delimiting system that assures proper chemical usage.
- Auto start/stop makes operation safe and easy.
- Integrated scrap tray prevents food soil from entering drain system.

Spec. # _____



Optional Temp-Sure™ heater assures a continuous supply of 140°F hot water that guarantees excellent results.



Unique pull-pin design allows wash arms to be easily removed for cleaning.



Bowl option available for capsule dispensed products.



Integrated scrap tray prevents food soil from entering drain system.




Top mounted controls include built-in chemical pumps and delimiting system that assures proper chemical usage.



Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.

AIA # _____

C
**Chemical Sanitizing
 Single Rack Corner
 Dishwasher**

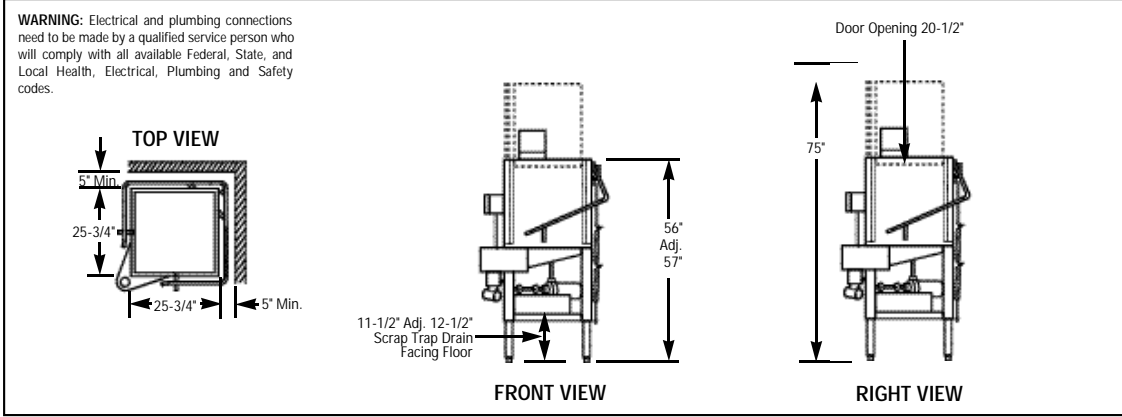

Specifications:

MODEL C	USA	METRIC	USA	METRIC
OPERATING CAPACITY RACKS PER HOUR (NSF RATED)	37	37	WASH PUMP MOTORS HP	1
OPERATING CYCLE			DIMENSIONS	
WASH TIME-SEC	45	45	DEPTH	25-3/4" (65.4cm)
RINSE TIME-SEC	30	30	WIDTH	25-3/4" (65.4cm)
DWELL TIME-SEC	15	15	HEIGHT	56"-57" (144cm)
TOTAL CYCLE TIME	90	90	STANDARD TABLE HEIGHT	34" (86cm)
WASH TANK CAPACITY	1.7 GAL.	(6.45 L)	MAXIMUM CLEARANCE FOR DISHES	17" (43cm)
PUMP CAPACITY	52 GPM	(197 LPM)	STANDARD DISHRACK DIMENSIONS	1 19-3/4"X19-3/4" (50X50cm)
OPERATING TEMPERATURE REQUIRED	120°F	(49°C)	ELECTRICAL RATING	VOLTS 115 AMPS 16
RECOMMENDED	140°F	(60°C)	SHIPPING WEIGHT APPROXIMATE	270# (122kg)
WATER CONSUMPTION PER RACK	1.7 GAL.	(6.45 L)		
PER HOUR	74 GPH	(212/280 LPH)		
WATER REQUIREMENTS WATER INLET	3/4"	-		
DRAIN-I.P.S.	2"	-		

Summary Specifications: Model C

CMAEnergy Mizer model C low temperature, chemical sanitizing commercial dishwasher meets NSF, UL and CSAsanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model C is constructed entirely of 304 stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 20" x 20" racks. Unit comes standard with upper and lower stainless steel wash arms. The model C incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

Available Options

- Solid/Powder Dual Bowl Dispenser
- CMA Temp-Sure™ (Self contained 12kW heater)
- Sanitizer Alarm
- Stainless Steel Dishtables
- Alternative cycle times
- Alternative electrical available for export

Spec. #

AIA #